

Roma
trick

A TRICK 50 TO MOVE 2024



SPECIFICATION



Model No.	A8
SIZE	R 84mm* H 274mm
Net weight	900g
Voltage	5V 2A
Power	8W
Battery	4000mAh
Coverage	up to 200 cube meters
Bottle	100ml
Material	aluminum

IMPORTANT



①

Make sure the bottle is screwed in tight and parallel to the upper part of the diffuser.



②


After installation, please keep the machine vertical. Tilted or angled may cause oil overflow, which will contaminated equipment circuit and affect the normal use and unnecessary waste.

SET UP




①

To open your scent diffuser, rotate the upper part of your device in a counterclockwise motion, while firmly holding the bottom.



②

Remove the empty oil bottle from the diffuser by turning it clockwise. Save this to use in the cleaning process of your diffuser.




③

Select your fragrance oil and carefully screw the bottle counterclockwise into the diffuser.



④


Once you have securely screwed on the fragrance oil, close the unit by sliding the upper back into place and turning clockwise.



⑤

Connect the power adapter into the diffuser's power port and plug it into 110V power outlet.

REMOTE CONTROL FUNCTIONS

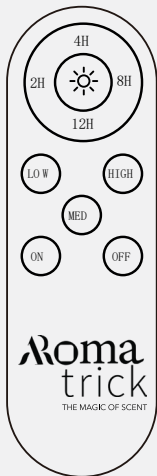

Power on the diffuser



Power off the diffuser and
Press and hold for 5 seconds to reset the device to
the factory default settings

INTENSITY SETTING



Diffusing for 10
seconds and pausing
for 240 seconds.



Diffusing for 20
seconds and pausing
for 120 seconds.



Diffusing for 25
seconds and pausing
for 60 seconds.

WORKING TIME SETTING



Indicates the diffuser
will work for 2 hours of
time length.



Indicates the diffuser
will work for 4 hours of
time length.



Indicates the diffuser
will work for 8 hours of
time length.



Indicates the diffuser
will work for 12 hours of
time length.



Light mode control:
Mode 1: Light on only when atomizing
Mode 2: Always on
Mode 3: Always off



Touch Screen Control



Diffusing for 25 seconds and pausing for 60 seconds.



Diffusing for 20 seconds and pausing for 120 seconds.



Diffusing for 10 seconds and pausing for 240 seconds.



Press and hold for 2 seconds to turn the diffuser on.
Press twice to change the lighting mode.
Press once to turn the diffuser off.

EQUIPMENT CLEANING

Your scent diffuser should be cleaned every 1-2 months and when switching fragrance to ensure optimal performance.

1. Fill the empty oil bottle that came with your diffuser with 1/4 inch of rubbing alcohol.
2. Screw the alcohol-filled bottle into the diffuser.
3. Run the diffuser for 15 mins to ensure the alcohol can filter through the whole device.
4. Unplug the device from the wall outlet and keep the diffuser in an upright position. Wipe the device with a damp cloth to remove oil stains and fingerprints. Avoid using any harsh or abrasive cleaning products.
5. Remove the alcohol-filled bottle, insert new fragrance oil. Reconnect both halves of the diffuser and plug it into the wall outlet. You are ready to begin a new scenting.

SAFETY

To ensure safe usage, follow these precautions:

1. Do not tilt the diffuser as oil can spill inside the device and damage the mechanics.
2. Use the scent diffuser and fragrance oils requires adult supervision.
3. Do not wet the device or place it near any liquids, sinks, bathtubs, or outdoors.
4. Do not use the device with any power cord other than the one provided with your diffuser. Position the power cord to prevent it from being a tripping hazard. Before connecting your diffuser to a power outlet, check that the voltage label specified on the adapter is the same as the power supply.
5. Do not run the unit on empty. Unless there is oil in the bottle or alcohol for cleaning, turn the device off.
6. Do not ingest any fragrance oil or apply them to any part of the skin. Keep oils out of contact with eyes, ears, nose, mouth, and any other bodily opening. If contact does occur, flush with water immediately until all traces of oil have been removed entirely from the area.

REPLACING THE NOZZLE

1. To change the nozzle, unplug the diffuser, remove the bottle of oil, and carefully pull out the clear tube. Gently pull out the black nozzle by wiggling it gently using a pair of tweezers.
2. Replace it with a new nozzle and ensure the nozzle is pressed very firmly into the top of the diffuser. The tube can be reinserted into the nozzle. It is very important that you put the tube into the correct opening of the nozzle otherwise the nozzle there is a small round tube holder that the tube needs to be firmly secured into.

Breakdown	Solution
Oil leaking	<ul style="list-style-type: none"> -Bottle is loose. Screw it in properly and straight; -Seal is broken or missing. Replace the supplied seal that came with the machine.
No diffuse	<ul style="list-style-type: none"> -Check if the power is ON or OFF; -The pump is damaged and needs replacing. -If there is no diffusion or it is weak, replace the oil with rubbing alcohol and run it through the machine for 5 minutes.
Little or no spray coming out	<ul style="list-style-type: none"> -Atomization head is blocked. Clean diffuser by running rubbing alcohol through it. Or replace diffuser core. -Diffuser core with straw is missing or damaged. Replace with a new one. -Pump is damaged and may need replacing.
Diffuser spraying liquid	<ul style="list-style-type: none"> -Diffuser core is damaged, replace diffuser core. -Machine is tilted or angled, Make sure it's upright at all times.
No display on screen	<ul style="list-style-type: none"> -Make sure the power is ON. -Display screen is damaged, try remote control.

Caution



Shall not modify, disassemble or repair the machine arbitrarily. w



Shall not damage the power cord, force to bend, yank, heavy load, clip or reprocess.



- o Shall not use the AC plug when it is damaged or un-matched with the socket.
- o Shall not wet the machine or the AC plug.
- o Shall not use overloaded power socket, wire or broken plug.



Shall not touch the wire or product shell when thundering or/and lightning.



Shall not disassemble the machine when it is under operation.

For any inquiry, please contact our live installation assistant



Warning:

- After installation, please keep the machine vertical, tilting the machine flat will cause oil leakage and damage to the machine.
- Do not refit, disassemble or repair the machine if you are not a technician. If the machine breaks down, please contact our customer care for help customercare@aromatrick.co.uk
- It is invalid to touch/tap the digital timer button when machine is under lock status.
- Each time cycle should be between (00:01 until 23:59), if you need your device to operate throughout the night time, make sure you divide the operation time to **two cycles**.

do not tilt/turn/move
when bottle is in device



Roma
trick